
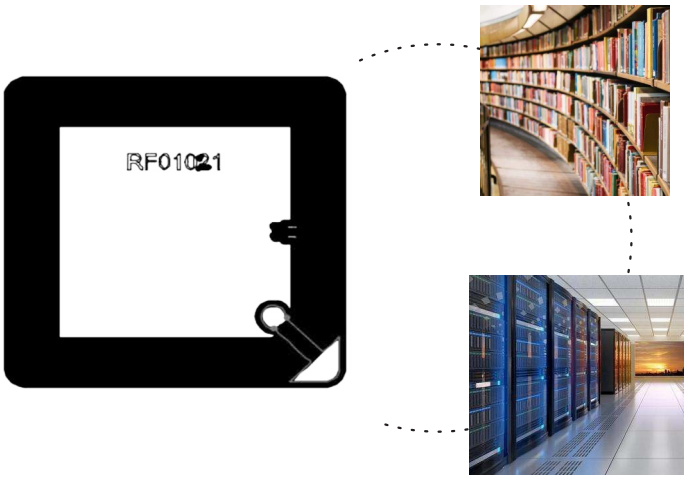


40 x 40 mm NTAG Inlay/Label

This inlay/label meets with ISO14443A standard, operating frequency is 13.56MHz.Each inlay has a unique ID and stores user data.It is applied to equipment tracking,IT assets management, library management, dangerous goods management, etc.

Antenna Size	40 x 40 mm
Wet Inlay/Label Size	43 x 43 mm (customized)
Material	Coated Paper / PET / PP Paper / Fragile Paper
Working Temp	-40~+85℃
Storage Temp	-20~50°C
Storage Humidity	20%~90% RH
RFID Standard	ISO14443A
Chip Type	NXP Ntag213/215/216
Read Range	0 - 10 cm
Data Storage	> 10 years
Re-write	100000 times
Customization	Printing LOGO, Barcode, Serial number, Encoding, Designing, etc.
Package	Reel core inner dimension: 76.2mm / 3(in), Outside diameter < 220 mm / 8.7(in), 1000-5000pcs/roll, 4 rolls /carton
Application	IT asset Tracking | Library management Document tracking management | Dangerous goods management

Dimensions:

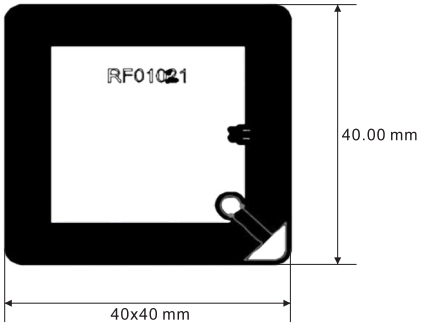

Application:







